


DATASHEET

Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,1000m

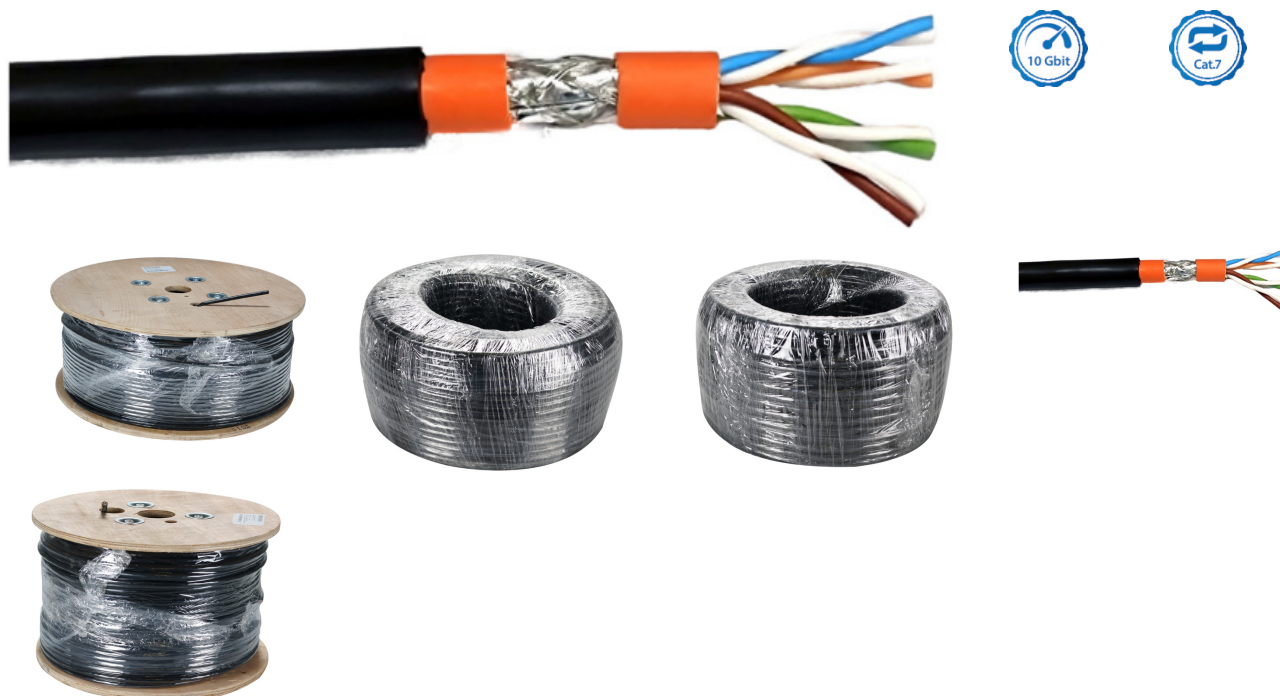

General data

The Cat.7 S/FTP indoor/outdoor cable is characterised by the cable construction 4x2xAWG23/1 and achieves a transmission frequency of up to 1200 MHz. The cable has a PE outer sheath and a halogen-free inner sheath and conforms to the IEC 60332-1 standard and Construction Products Regulation (BauPVO) Euroclass Dca. The cable is suitable for installations in dry or damp rooms, outdoors or underground. Conforms to the standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1.

Allgemeine Daten

Conductor category	Class 1 = solid
Material outer sheath	PE + LSZH
Category	7
Stranding element	Pairs
Core identification	Colour
Halogen free	acc. EN 60754-1/2;acc. EN 60754
UV resistance	yes

Mechanische Eigenschaften

Bending radius (dynamic)	8 x OD
--------------------------	--------

This datasheet was created automatically on 14-12-2022 . Technical changes reserved.



DATASHEET

Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,1000m

Bending radius (static)	7 x OD
-------------------------	--------

Kabelaufbau

AWG-size	23/1
Conductor material	Cu, tinned
Diameter conductor	0.56 mm
Cable Construction	S/FTP

Kabelmantel

Low smoke	acc. EN 61034
Flame retardant	acc. EN 60332-1;acc. IEC 60754-2;acc. IEC 61034

Umgebungsbedingungen

Permitted cable outer temperature during assembling/handling	0 - 50 °C
Operating temperature, storage	-30 - 70 °C
Permitted cable outer temperature after assembling without vibration	-30 - 70 °C

Elektrische Eigenschaften

Loop resistance	171.2 Ohm/km
Test voltage DC, 1 min	1000 V
Screen over stranding element	Foil
Characteristic impedance	100 ± 15 Ohm
Separation class acc. EN50174-2	D
Screen over stranding	foil + braid
Coupling attenuation	80 dB
Resistance unbalance	3 %
PoE	acc. to IEEE802.3at PoE+;acc. to IEEE802.3af PoE;yes;acc. to IEEE802.3bt 4PPoE
Core insulation	foam-skin PE
Coupling attenuation Type	Type 1
NVP value	76 %
Max. Frequency	1200 MHz

Normen, Zulassungen, Zertifizierungen

This datasheet was created automatically on 14-12-2022 . Technical changes reserved.



DATASHEET

Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,1000m

Installation standard	EN 50174
Cabling standards	EN 50173-1;ISO/IEC 11801
Transmission standards	IEEE 802.3 10Mbit to 10Gbit
Cable	EN 50288-4-1;IEC 61156-5
Directive/Regulation	RoHS 2011/65/UE;REACH 1907/2006/EC
Halogen free (according to EN 60754-1/2)	True

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length of	Number of cores	Type	Cu-Zahl	Gewicht	Max. Zugkraft ca.	Außendurchmesser	Brandlast
99733.1-CPR	Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,1000m	black	1.0 m	8	simplex	25,9 kg/km	132 kg/km	100 N	8,4 mm	1200 MJ/km
99733.100-CPR	Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,100m	black	100.0 m	8	simplex	25,9 kg/km	132 kg/km	100 N	8,4 mm	1200 MJ/km
99733.25-CPR	Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,25m	black	25.0 m	8	simplex	25,9 kg/km	132 kg/km	100 N	8,4 mm	1200 MJ/km

This datasheet was created automatically on 14-12-2022 . Technical changes reserved.



DATASHEET

Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,1000m

99733.250-CPR	Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,250m	black	250.0 m	8	simplex	25,9 kg/km	132 kg/km	100 N	8,4 mm	1200 MJ/km
99733.50-CPR	Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,50m	black	50.0 m	8	simplex	25,9 kg/km	132 kg/km	100 N	8,4 mm	1200 MJ/km
99733.500-CPR	Cat.7 In-/Outdoor cable 1200MHz AWG23 S/FTP,PE jacket, inner Dca, Sw& Or,500m	black	500.0 m	8	simplex	25,9 kg/km	132 kg/km	100 N	8,4 mm	1200 MJ/km

This datasheet was created automatically on 14-12-2022 . Technical changes reserved.

